




Installation accessories and scene

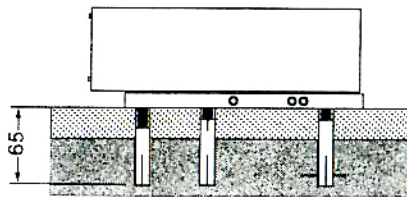


Install scene: floor tile, cement floor
Accessories categories: top screw

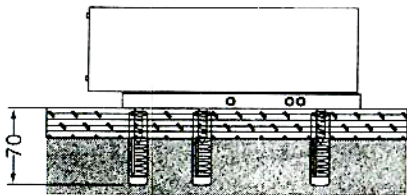

Install the scene: wood floor
Accessories categories: wooden teeth screw and the expansion pipe

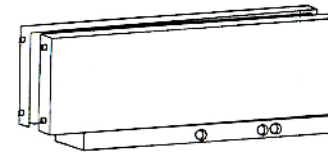


Hydraulic door clip

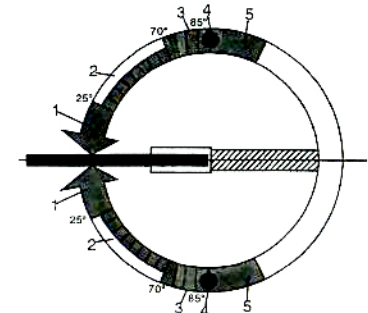

1. Door range: 20 degrees - 0 degrees (in valve screw 2 adjustment)
2. Door range: 70 degrees - 25 degrees (in valve screw 2 adjustment)
3. Door range: 85 degrees - 70 degrees (unadjustable)
4. Locate the configuration: 90 degrees - 125 degrees
5. Maximum open width: 125 degrees

Product analysis diagram

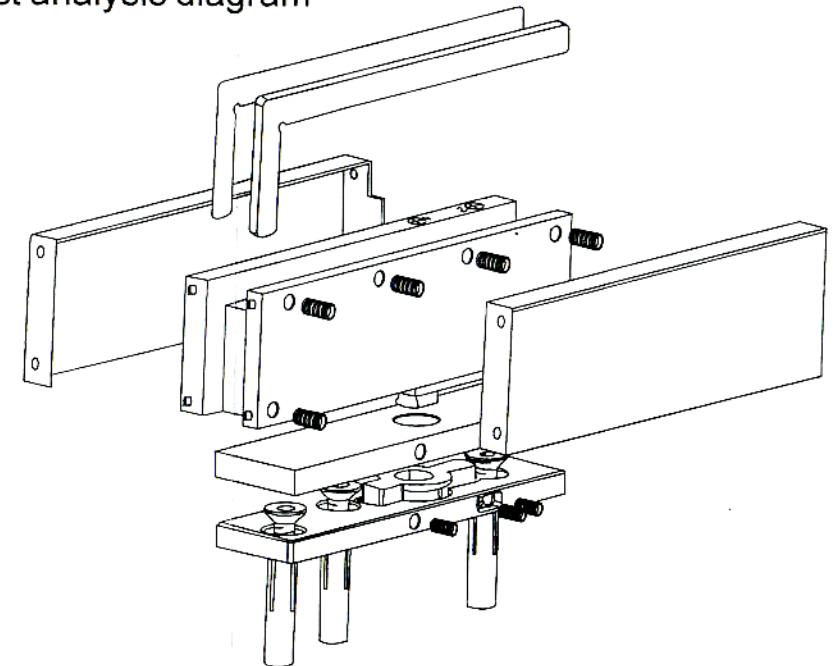

Gasket configuration

Thick glass door	Dosage and gasket thickness	
	2mm	1mm
10mm	2	2
12mm	2	0
14mm	0	2